

Ambu® aScope™ 3 Large 5.8/2.8

The single-use flexible videoscope



Key Benefits

- **Instant accessibility**
Always at hand when needed, saving valuable time and enhancing patient airway safety.
- **High degree of usability**
The portable, plug and play system is easy to transport and set up. It is ready for use in no time.
- **Cost efficiency**
Reduced costs due to low capital investment, no reprocessing or repair costs and higher workflow efficiency.
- **No risk of cross-contamination**
Sterility straight from the pack reduces the risk of cross-contamination.

Ambu® aScope™ 3 Large 5.8/2.8

Bronchoscopy made easy

aScope 3 Large is a single-use flexible scope that once and for all solves the problem of availability and risk of cross-contamination, simplifies bedside bronchoscopy procedures and eliminates the needs and costs of cleaning and repairs.

The aScope 3 Large is suitable for a wide range of bronchoscopy procedures in the ICU, OR, and ER. With a channel width of up to 2.8 mm, aScope 3 Large is the ideal alternative to reusable scopes for bedside bronchoscopy procedures.

When connected to the portable monitor, Ambu® aView™, a high-resolution image enables easy navigation and fast identification of anatomical landmarks.

Enabling you to provide the best care

By switching to the sterile single-use aScope 3 Large, you enhance patient safety by ensuring immediate access to a flexible scope and eliminating the risk of cross-contamination.

Specifications

Optical system	
Field of View	85°
Direction of View	0° (forward viewing)
Depth of Field	8-19 mm
Illumination method	LED
Insertion portion	
Bending section	140° up, 110° down°
Insertion cord diameter	5.8 mm (0.23")
Distal end diameter	6.2 mm (0.24")
Maximum diameter of insertion portion	6.3 mm (0.25")
Minimum endotracheal tube size (inner diameter)	7.0 mm
Minimum double lumen tube size (inner diameter)	-
Working length	600 mm (23.6")
Channel	
Average inner diameter	2.8 mm (0.110")
Minimum instrument channel width	2.6 mm (0.102")
Suction connector	
Connecting tube inner diameter range	Ø7 mm +/- 1 mm
Operating environment, storage & transportation	
Temperature in operating environment	10 ~ 40° C (50 to 104° F)
Temperature during transportation	10 ~ 40° C (50 to 104° F)
Temperature during storage	10 ~ 25° C (50 ~ 77° F)
Relative humidity	30 ~ 85%
Atmospheric pressure	80 ~ 109 kPa
Altitude	≤2000 m
Sterilisation	
Method of sterilisation	EtO



Ambu® aScope™ 3 and Ambu® aView™




The ergonomic and lightweight handle is designed for optimal user comfort

Ordering specifications

Item no.	Quantity (Ambu® aScope™ 3 Large 5.8/2.8)
414001000	5

Introducer

To facilitate introduction of Luer Lock syringes and soft endoscopic accessories through working channel

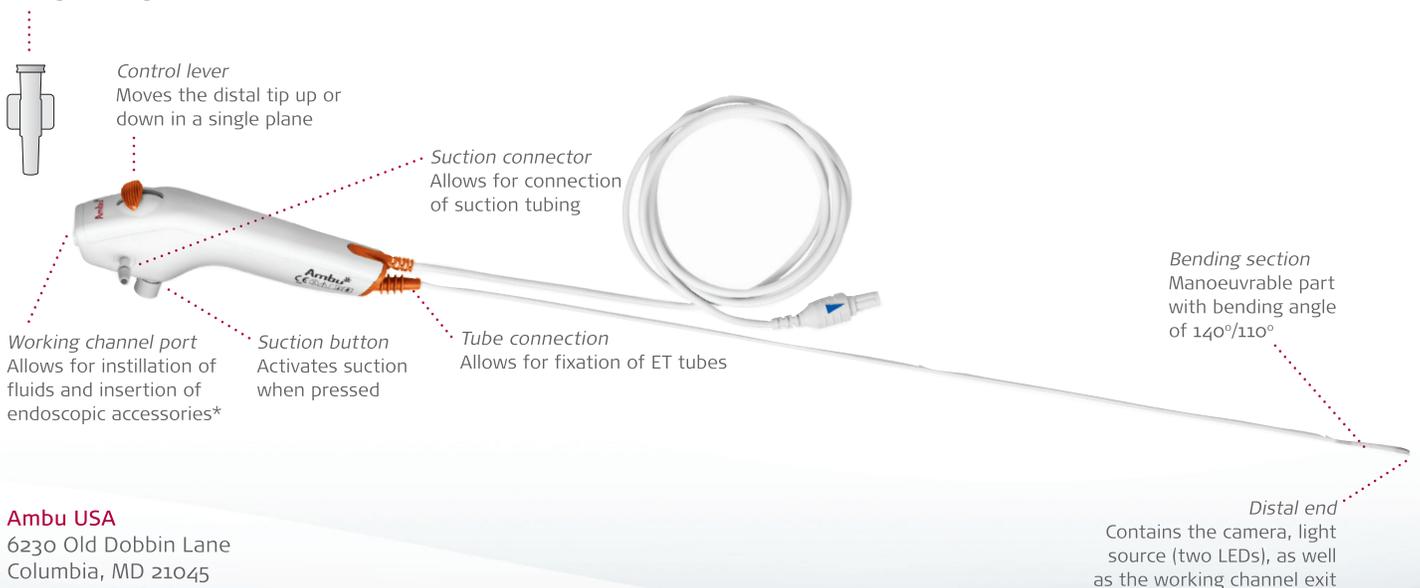

Ambu USA

6230 Old Dobbin Lane
Columbia, MD 21045
Tel. 800 262 8462
Fax 800 262 8673
www.ambuUSA.com

* There is no guarantee that accessories selected solely using this minimum instrument channel width will be compatible in combination.