

# VivaSight-DL

The new generation of double lumen tubes  
for One Lung Ventilation

## Key Benefits

- Provides real-time visual monitoring during placement and throughout the entire OLV procedure
- Helps overcome today's placement and positioning challenges of OLV
- Makes lung isolation fast and effective
- Provides a clinical benefit and improves patient safety
- Integrated with Ambu® aView™ monitor



## VivaSight-DL

### Continuous monitoring during One Lung Ventilation

Intubation and airway management during isolation procedures present a series of challenges for even the most experienced team. Visualization during One Lung Ventilation (OLV) increases patient safety and is increasingly recommended as good clinical practice.

### One Lung Ventilation made simple and safe

VivaSight-DL is the new generation of Double Lumen Tubes with integrated high-resolution camera providing placement of the DLT

fast and effective as well as continuous visual monitoring throughout the procedure. Malpositioning and dislocation are easily detected and corrected. The real-time high resolution video image is transmitted to Ambu® aView™ monitor. Secretion or blood can be cleaned using the integrated flushing system.

The full Ambu portfolio for OLV also includes VivaSight-SL (ETT) with integrated high-resolution camera together with the FujiUniblocker and the single-use bronchoscope aScope™ 4 Broncho Slim.


# Specifications

VivaSight-DL with aView adapter cable	35 Fr Left	37 Fr Left	39 Fr Left	41 Fr Left	VivaSight-DL Set Includes	Quantity
Size	35 Fr	37 Fr	39 Fr	41 Fr	VivaSight-DL with aView adapter cable	1
ID (mm- effective)	4.0	4.2	4.8	5.0	Suction Catheter Straight 8 FR	2
OD (mm- bronchial)	10.5	11.5	11.5	12.0	Suction Catheter Curved 10 FR	2
Length (+2/0mm)	330	330	330	330		

General	Camera
<b>Usage:</b> Single-use only <b>Pack:</b> Supplied individually packaged, ETO-sterilized <b>Shelf life:</b> 36 months <b>Storage:</b> store at temperatures between 0°C- 42°C in a dry and dark place	<b>Image sensor:</b> CMOS <b>Resolution:</b> CIF 320 x 240 (76,800 pixels) <b>Depth of field:</b> 12-60 mm <b>Field of view:</b> ~100° diagonal
Materials	Light Source
<b>Tube:</b> Medical-grade PVC; additional injection port for rinsing camera optics <b>Cuff:</b> Medical-grade PVC, high volume, low pressure <b>Tube hardness:</b> 87 (Shore A)	<b>LEDs:</b> 2 white <b>LED power:</b> 49.5mW - 66mW
	Electrical
	<b>Power:</b> Up to 36 mA @ DC 5V

# Ordering specifications

VivaSight-DL with aView adapter cable	Order number	Quantity/box
VivaSight-DL 35 Fr - Left	DLVT35LAS	5
VivaSight-DL 37 Fr - Left	DLVT37LAS	5
VivaSight-DL 39 Fr - Left	DLVT39LAS	5
VivaSight-DL 41 Fr - Left	DLVT41LAS	5
Monitor	Order number	Quantity/box
aView monitor	405002000	1

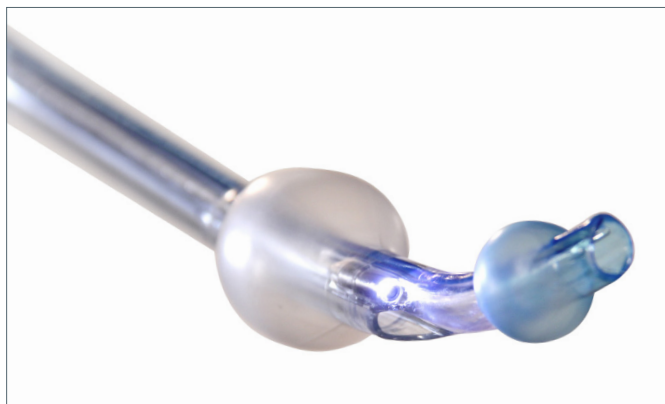

VivaSight-DL



VivaSight-DL connected to Ambu® aView™ monitor

**Ambu Inc.**  
 6230 Old Dobbin Lane  
 Columbia, MD 21045  
 Tel. 800 262 8462  
 Fax 800 262 8673  
[ambuUSA.com](http://ambuUSA.com)

US: Rx only

